


balance

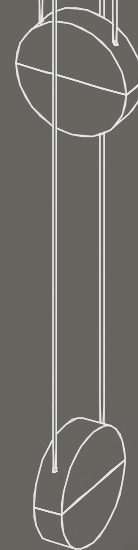

archilume

archilume.com


balance

120"
3048mm
variable

Ø 4"
Ø 102mm

Balance consists of a pair of disc shapes suspended by twinned cables, one beneath the other, hung in perpendicular directions. The upper half of each disc is opaque machined aluminum while the lower half is an acrylic lens with a frosted edge emitting a glare-free warm tone.

Compositionally balanced while creating visual tension, Balance offers an arresting sculptural accent in a beautifully functional luminaire.

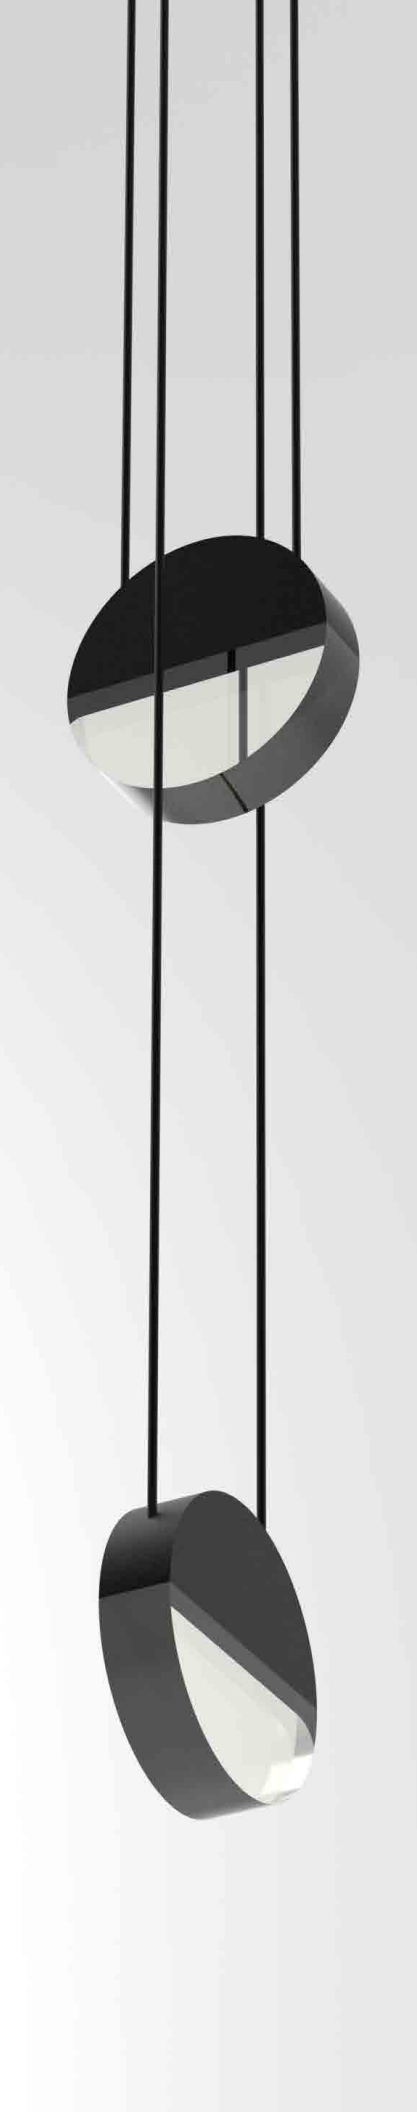

balance

archilume
archilume.com

Description: High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 4 watt warm dimmable LED, 400 lumens, 95 CRI, 3000K to 1800K smooth dimming transition. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 driver (0-10V dimmable), 120/277V 50/60Hz, 250mA driver (sold separate). See D8-250 remote driver spec sheet for details.

Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable.

Metal finish: Clear anodized aluminum (Custom anodized finishes available)

Light Distribution Optics: Clear acrylic light control lens with diffuse light distribution aperture

Approvals: Dry locations, approved to UL safety standards for luminaires when used with Archilume D8 series driver.

Order Code: P2_Balance

