

**Description:** High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

**Lamping:** Single 2 watt LED, 150 lumens, 90 CRI, 2700K (warm white color temperature). Color consistent from LED to LED within a 3 step MacAdam ellipse.

**Electrical:** Constant current class 2 integral drivers, 120-277V 50/60Hz input, 700mA constant current class 2 output. Class A sound rating. Short circuit protection. The violet (positive) and the gray (negative) leads provided are for use with 0-10V DC type dimmers and controls.

**Function:** Canopy and mounting plate provided in 1 piece construction, to be assembled on site. Mounts over 4" octagonal j-box (by others). 120"(3048mm) suspension cable provided standard. Field adjustable.

**Metal finish:** Clear anodized aluminum (Custom anodized finishes available)

**Light Distribution Optics:**




Diffuse (standard)



Concentric (optional)

**Approvals:** Dry locations, approved to UL safety standards for luminaires.

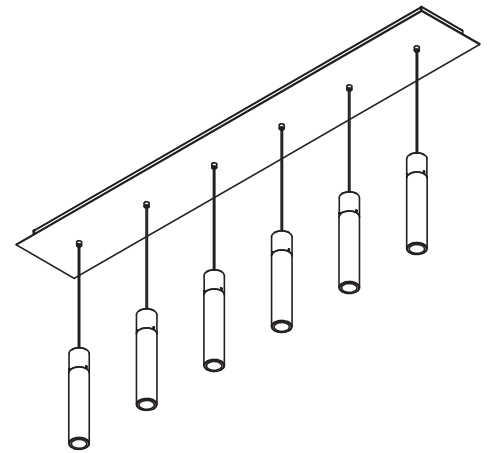


42"  
1067mm

6"  
152mm




7"  
178mm

120"  
3048mm  
variable

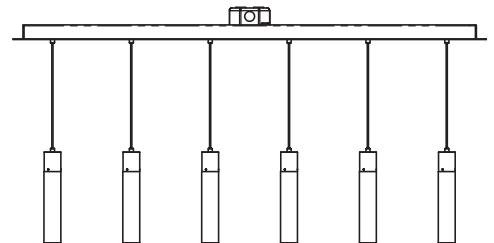

8"  
203mm

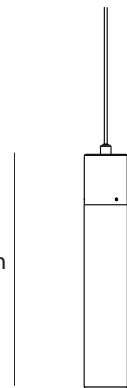

Ø 1.50"  
Ø 38mm