

Description: High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

Lamping: Single 2 watt LED, 150 lumens per lamp head, 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options. Color consistent from LED to LED within a 3 step MacAdam ellipse.

Electrical: Constant current class 2 integral driver, 120-277V 50/60Hz input, constant current class 2 output. Class A sound rating. Short circuit protection. 0-10V dimmable (010). The violet (positive) and the gray (negative) leads provided are for use with 0-10V DC type dimmers and controls.

Function: Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable.

Metal finish:
 Clear anodized aluminum (S)
 Black anodized aluminum (B)
 Gold anodized aluminum (G)
 Champagne anodized aluminum (C)


Light Distribution Optics:



Clear cylinder diffuse aperture (CD)
 Satin cylinder diffuse aperture (SD)
 Clear cylinder concentric aperture (CC)

Approvals: Dry locations, approved to UL safety standards for luminaires.


Order Code: P11L- _____ - _____ - _____ - _____
 27 2700K S silver CD clear cylinder diffuse aperture 010 0-10V dimming
 30 3000K B black SD satin cylinder diffuse aperture
 35 3500K G gold CC clear cylinder concentric aperture
 C champagne

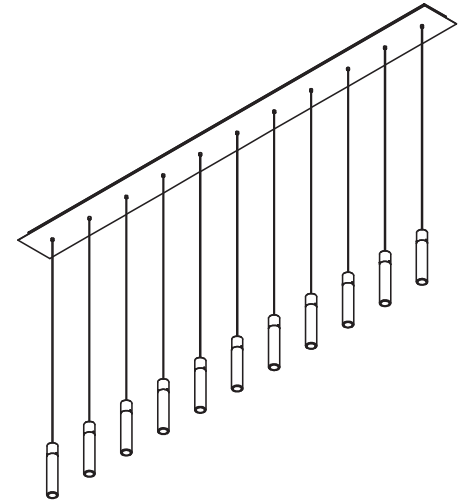


77"
1956mm



6"
152mm
7"
178mm

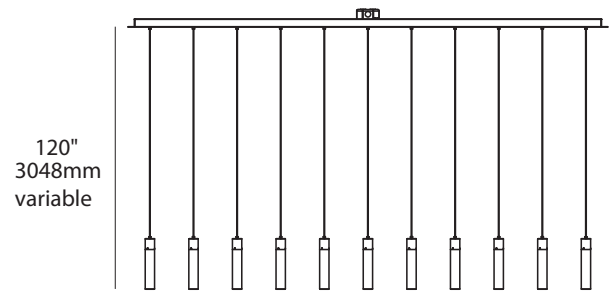

120"
3048mm
variable

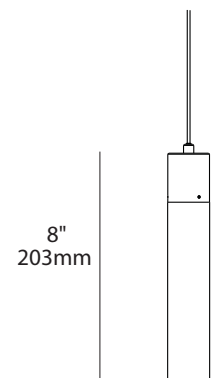

8"
203mm

Ø 1.50"
Ø 38mm