

**Description:** High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.

**Lamping:** Single 2 watt LED, 150 lumens per lamp head, 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options. Color consistent from LED to LED within a 3 step MacAdam ellipse.

**Electrical:** Constant current class 2 integral driver, 120-277V 50/60Hz input, constant current class 2 output. Class A sound rating. Short circuit protection. 0-10V dimmable (010). The violet (positive) and the gray (negative) leads provided are for use with 0-10V DC type dimmers and controls.

**Function:** Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable.

**Metal finish:**  
 Clear anodized aluminum (S)  
 Black anodized aluminum (B)  
 Gold anodized aluminum (G)  
 Champagne anodized aluminum (C)


**Light Distribution Optics:**



Clear cylinder diffuse aperture (CD)  
 Satin cylinder diffuse aperture (SD)  
 Clear cylinder concentric aperture (CC)


**Approvals:** Dry locations, approved to UL safety standards for luminaires.

**Order Code:** P30- \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_  
 27 2700K S silver CD clear cylinder diffuse aperture 010 0-10V dimming  
 30 3000K B black SD satin cylinder diffuse aperture  
 35 3500K G gold CC clear cylinder concentric aperture  
 C champagne

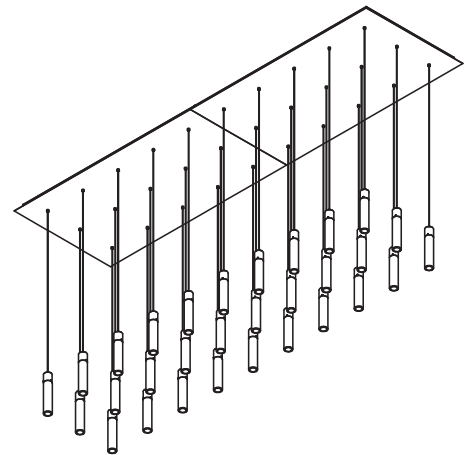


84"  
2134mm


23"  
584mm

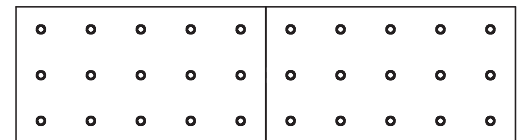

120"  
3048mm  
variable

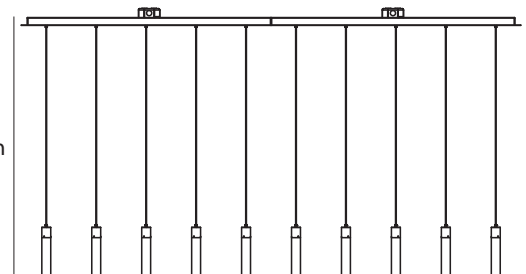

8"  
203mm



Ø 1.50"  
Ø 38mm