

**Description:** High efficiency LED decorative pendant mount luminaire with machined aluminum housing and clear acrylic light control lens.


**Lamping:** Single 2 watt LED, 150 lumens per lamp head, 90 CRI, 2700K (27), 3000K (30), 3500K (35) color temperature options. Color consistent from LED to LED within a 3 step MacAdam ellipse.

**Electrical:** Constant current class 2 integral driver, 120-277V 50/60Hz input, constant current class 2 output. Class A sound rating. Short circuit protection. 0-10V dimmable (010). The violet (positive) and the gray (negative) leads provided are for use with 0-10V DC type dimmers and controls.

**Function:** Canopy and mounting plate provided. Mounts directly to 4" octagonal j-box (by others) 120"(3048mm) suspension cable provided standard. Field adjustable.

**Metal finish:**  
 Clear anodized aluminum (S)  
 Black anodized aluminum (B)  
 Gold anodized aluminum (G)  
 Champagne anodized aluminum (C)

**Light Distribution Optics:**





Clear cylinder diffuse aperture (CD)  
 Satin cylinder diffuse aperture (SD)  
 Clear cylinder concentric aperture (CC)

**Approvals:** Dry locations, approved to UL safety standards for luminaires.


**Order Code:** P8A- \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_

27	2700K	S	silver	CD	clear cylinder diffuse aperture	010	0-10V dimming
30	3000K	B	black	SD	satin cylinder diffuse aperture		
35	3500K	G	gold	CC	clear cylinder concentric aperture		
		C	champagne				

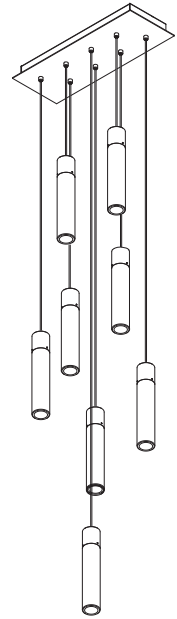

14"  
356mm

5.25"  
133mm



120"  
3048mm  
variable

6"  
152mm

8"  
203mm

Ø 1.50"  
Ø 38mm